

MBR Nylon Frame Plug for softer materials

MBR Nylon Frame Plug with a special screw made from high quality Polyamide PA6, approved for multiple use in concrete and masonry



1 SPECIFICATIONS OF INTENDED USE

Anchorage subject to:

- For multiple use in concrete and masonry for non-structural applications, such as façade systems, for fixing or supporting elements which contribute to the stability of the systems

Base materials:

- Cracked and non-cracked, reinforced or unreinforced normal weight concrete of strength classes \geq C12/15 according to EN 206-1:2014
-Masonry walls and aerated concrete blocks

Approvals:

- European Technical Approval, ETAG 020 anchors for multiple use in concrete and masonry for non-structural applications

Installation:

-The influence of larger embedment depths, lower mortar strength and/or different bricks and blocks (according ETA-15/0068 regarding base material, size of the units, compressive strength) has to be detected by job site tests)

Product assortment:

- MBR Nylon Frame Plug for softer materials can be complied with countersunk, hexagon or with hexagon collar screw in stainless steel (A4/316) or in zinc plated version

Safety in case of fire:

- Anchorages satisfy requirements for Class A 1
- Assessment of resistance under fire exposure F90 for fastening of façade systems (for further information see ETA-15/0068, issued on 21.04.2021)


2 PRODUCT DESCRIPTION - MATERIALS

Product	Designation	Material	Nominal characteristic steel yield strength f_{yk} [N/mm ²]	Nominal characteristic steel ultimate strength f_{uk} [N/mm ²]	Surface coating
1	MBR Frame Plug (sleeve)	Polyamide, PA6 (Nylon)	—	—	—
2	Carbon steel (screw)	Carbon steel	480	600	Galvanized $>5\mu\text{m}$, blue passivated
3	Stainless steel (screw)	Stainless steel A4 (EN 10088)	450	700	—

3 INSTALATION INSTRUCTIONS


1. Make the hole (no hammer drilling in hollow masonry brick or aerated concrete),
2. Cleaning the hole (not necessary with hollow brick) and setting the preassembled fastener through the part to be fixed,
3. Push the anchor till the collar of the sleeve contacts the part to be fixed, then fix the part with screw,
4. Tightening the screw until sleeve collar contact.

Graphic installation instruction for MBR Nylon Frame Plug

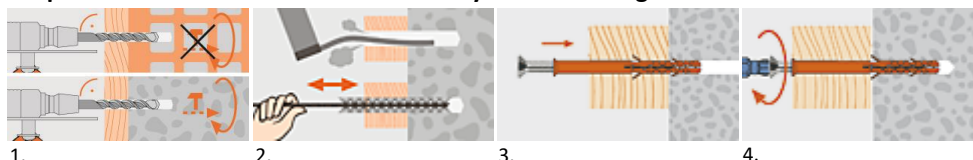

4 INSTALATION DATA

Fastener size MBR			10	
Anchor outer diameter	d_{nom}	[mm]	10	
Anchor length	L	[mm]	60-240	
Screw diameter	d_s	[mm]	7	
Installation parameters			Concrete	Masonry
Nominal drilling diameter	d_0	[mm]	10	
Depth of the drill hole	$h_0 \geq$	[mm]	60	
Effective anchorage depth	h_{ef}	[mm]	50	
Screw effective anchorage depth	L_s	[mm]	L + 5 mm	
Maximum fixture thickness	t_{fix}	[mm]	≤ 190	

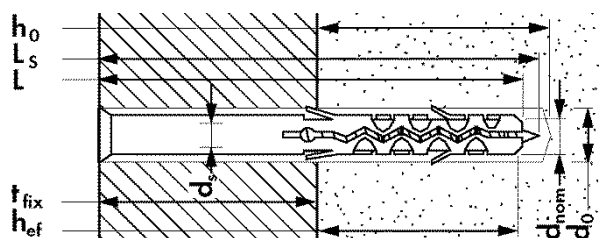


5 BASIC PERFORMANCE DATA IN CRACKED OR NON-CRACKED CONCRETE

Basic performance data for MBR Nylon Frame Plug in cracked or non-cracked concrete, without influence of edge distance, spacing and splitting failure due to dimensions of concrete member.


CONCRETE				MBR 10
Effective anchorage depth	h_{ef}	[mm]		50
Minimum thickness of concrete member	h_{min}	[mm]		100
Minimum edge distance	$\geq C16/20$	S_{min}	[mm]	50
	C12/15	S_{min}	[mm]	70
Minimum spacing	$\geq C16/20$	C_{min}	[mm]	50
	C12/15	C_{min}	[mm]	70
CHARACTERISTIC RESISTANCE				
Tension load for cracked or non-cracked concrete	$\geq C16/20$	N_{Rk}	[kN]	1.50
	C12/15	N_{Rk}	[kN]	0.90
Shear load for cracked or non-cracked concrete	Galvanized Steel	V_{Rk}	[kN]	8.50
	Stainless Steel	V_{Rk}	[kN]	8.50
Bending moment, steel failure	Galvanized Steel	M_{Rk}	[Nm]	15.30
	Stainless Steel	M_{Rk}	[Nm]	17.80
DESIGN RESISTANCE				
Tension load for cracked or non-cracked concrete	$\geq C16/20$	N_{Rd}	[kN]	0.83
	C12/15	N_{Rd}	[kN]	0.50
Shear load for cracked or non-cracked concrete	Galvanized Steel	V_{Rd}	[kN]	6.80
	Stainless Steel	V_{Rd}	[kN]	5.45
Bending moment, steel failure	Galvanized Steel	M_{Rd}	[Nm]	12.24
	Stainless Steel	M_{Rd}	[Nm]	11.41
RECOMENDED RESISTANCE				
Tension load for cracked or non-cracked concrete	$\geq C16/20$	N_{rec}	[kN]	0.60
	C12/15	N_{rec}	[kN]	0.36
Shear load for cracked or non-cracked concrete	Galvanized Steel	V_{rec}	[kN]	4.86
	Stainless Steel	V_{rec}	[kN]	3.89
Bending moment, steel failure	Galvanized Steel	M_{rec}	[Nm]	8.74
	Stainless Steel	M_{rec}	[Nm]	8.15

6 VALUES OF RESISTANCE UNDER TENSION AND SHEAR LOADS IN MASONRY UNITS

6.1 Clay masonry


CLAY HOLLOW BRICK				MBR 10
Effective anchorage depth		h_{ef}	[mm]	50
Swiss Modul 	Brick dimensions [mm]	300x150x190		
	Bulk density	$\geq P$	[kg/dm ³]	0.8
	Minimum member thickness	h_{min}	[mm]	150
	Minimum edge distance	C_{min}	[mm]	150
	Min. spacing (Vertical to edge)	$S_{1,min}$	[mm]	300
	Min. spacing (Parallel to edge)	$S_{2,min}$	[mm]	600
CHARACTERISTIC RESISTANCE				
Tension load for minimum compressive strength		$\geq 25 \text{ N/mm}^2$	N_{Rk}	[kN] 0.40
Shear load for minimum compressive strength ¹⁾		$\geq 25 \text{ N/mm}^2$	V_{Rk}	[kN] 0.40
DESIGN RESISTANCE				
Tension load for minimum compressive strength		$\geq 25 \text{ N/mm}^2$	N_{Rd}	[kN] 0.16
Shear load for minimum compressive strength ¹⁾		$\geq 25 \text{ N/mm}^2$	V_{Rd}	[kN] 0.16
RECOMENDED RESISTANCE				
Tension load for minimum compressive strength		$\geq 25 \text{ N/mm}^2$	N_{rec}	[kN] 0.11
Shear load for minimum compressive strength ¹⁾		$\geq 25 \text{ N/mm}^2$	V_{rec}	[kN] 0.11


¹⁾Shear load with lever arm is not allowed

CLAY HOLLOW BRICK				MBR 10
Effective anchorage depth		h_{ef}	[mm]	50
Brickyard 87727 Kloster-beuren, Germany Z-17.1-1038 	Brick dimensions [mm]	373x175x238		
	Bulk density	$\geq P$	[kg/dm ³]	1.4
	Minimum member thickness	h_{min}	[mm]	175
	Minimum edge distance	C_{min}	[mm]	185
	Min. spacing (Vertical to edge)	$S_{1,min}$	[mm]	300
	Min. spacing (Parallel to edge)	$S_{2,min}$	[mm]	600
CHARACTERISTIC RESISTANCE				
Tension load for minimum compressive strength		$\geq 25 \text{ N/mm}^2$	N_{Rk}	[kN] 0.60
Shear load for minimum compressive strength ¹⁾		$\geq 25 \text{ N/mm}^2$	V_{Rk}	[kN] 0.60
DESIGN RESISTANCE				
Tension load for minimum compressive strength		$\geq 25 \text{ N/mm}^2$	N_{Rd}	[kN] 0.24
Shear load for minimum compressive strength ¹⁾		$\geq 25 \text{ N/mm}^2$	V_{Rd}	[kN] 0.24
RECOMENDED RESISTANCE				
Tension load for minimum compressive strength		$\geq 25 \text{ N/mm}^2$	N_{rec}	[kN] 0.17
Shear load for minimum compressive strength ¹⁾		$\geq 25 \text{ N/mm}^2$	V_{rec}	[kN] 0.17


¹⁾Shear load with lever arm is not allowed

6.2 Calcium silicate masonry


CALCIUM SILICATE SOLID BRICK				MBR 10
Effective anchorage depth			h_{ef}	[mm] 50
KS-Ratio-flat element 20-2.0-8DF		Brick dimensions [mm]	498x115x248	
		Bulk density	$\geq P$	[kg/dm ³] 2
		Minimum member thickness	h_{min}	[mm] 115
		Minimum edge distance	C_{min}	[mm] 100
		Min. spacing (Vertical to edge)	$S_{1,min}$	[mm] 200
		Min. spacing (Parallel to edge)	$S_{2,min}$	[mm] 400
CHARACTERISTIC RESISTANCE				
Tension load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	N_{Rk}	[kN] 2.00
Tension load for minimum compressive strength		$\geq 20 \text{ N/mm}^2$	N_{Rk}	[kN] 2.50
Shear load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	V_{Rk}	[kN] 2.00
Shear load for minimum compressive strength		$\geq 20 \text{ N/mm}^2$	V_{Rk}	[kN] 2.50
DESIGN RESISTANCE				
Tension load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	N_{Rd}	[kN] 0.80
Tension load for minimum compressive strength		$\geq 20 \text{ N/mm}^2$	N_{Rd}	[kN] 1.00
Shear load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	V_{Rd}	[kN] 0.80
Shear load for minimum compressive strength		$\geq 20 \text{ N/mm}^2$	V_{Rd}	[kN] 1.00
RECOMENDED RESISTANCE				
Tension load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	N_{rec}	[kN] 0.57
Tension load for minimum compressive strength		$\geq 20 \text{ N/mm}^2$	N_{rec}	[kN] 0.71
Shear load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	V_{rec}	[kN] 0.57
Shear load for minimum compressive strength		$\geq 20 \text{ N/mm}^2$	V_{rec}	[kN] 0.71

CALCIUM SILICATE HOLLOW BRICK				MBR 10
Effective anchorage depth			h_{ef}	[mm] 50
Calcium silicate Ratio flat element 12-1.6-8DF		Brick dimensions [mm]	498x115x248	
		Bulk density	$\geq P$	[kg/dm ³] 1.6
		Minimum member thickness	h_{min}	[mm] 115
		Minimum edge distance	C_{min}	[mm] 100
		Min. spacing (Vertical to edge)	$S_{1,min}$	[mm] 200
		Min. spacing (Parallel to edge)	$S_{2,min}$	[mm] 400
CHARACTERISTIC RESISTANCE				
Tension load for minimum compressive strength		$\geq 12 \text{ N/mm}^2$	N_{Rk}	[kN] 1.20
Shear load for minimum compressive strength		$\geq 12 \text{ N/mm}^2$	V_{Rk}	[kN] 1.20
DESIGN RESISTANCE				
Tension load for minimum compressive strength		$\geq 12 \text{ N/mm}^2$	N_{Rd}	[kN] 0.48
Shear load for minimum compressive strength		$\geq 12 \text{ N/mm}^2$	V_{Rd}	[kN] 0.48
RECOMENDED RESISTANCE				
Tension load for minimum compressive strength		$\geq 12 \text{ N/mm}^2$	N_{rec}	[kN] 0.34
Shear load for minimum compressive strength		$\geq 12 \text{ N/mm}^2$	V_{rec}	[kN] 0.34

6.3 Solid brick made of concrete (with dense and lightweight aggregates)

SOLID BRICK LIGHTWEIGHT AGGREGATES				MBR 10
Effective anchorage depth		h_{ef}	[mm]	50
Liapor solid brick		Brick dimensions [mm]	240x115x95	
		Bulk density	$\geq P$	[kg/dm ³] 1.2
		Minimum member thickness	h_{min}	[mm] 115
		Minimum edge distance	C_{min}	[mm] 100
		Min. spacing (Vertical to edge)	$S_{1,min}$	[mm] 200
		Min. spacing (Parallel to edge)	$S_{2,min}$	[mm] 400
CHARACTERISTIC RESISTANCE				
Tension load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	N_{Rk}	[kN] 0.90
Shear load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	V_{Rk}	[kN] 0.90
DESIGN RESISTANCE				
Tension load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	N_{Rd}	[kN] 0.36
Shear load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	V_{Rd}	[kN] 0.36
RECOMENDED RESISTANCE				
Tension load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	N_{rec}	[kN] 0.26
Shear load for minimum compressive strength		$\geq 10 \text{ N/mm}^2$	V_{rec}	[kN] 0.26

6.4 Concrete hollow brick

CONCRETE HOLLOW BRICK				MBR 10
Effective anchorage depth		h_{ef}	[mm]	50
Concrete Hollow block Hbn 6-1.2 8DF		Brick dimensions [mm]	495x115x238	
		Bulk density	$\geq P$	[kg/dm ³] 1.2
		Minimum member thickness	h_{min}	[mm] 115
		Minimum edge distance	C_{min}	[mm] 100
		Min. spacing (Vertical to edge)	$S_{1,min}$	[mm] 200
		Min. spacing (Parallel to edge)	$S_{2,min}$	[mm] 400
CHARACTERISTIC RESISTANCE				
Tension load for minimum compressive strength		$\geq 6 \text{ N/mm}^2$	N_{Rk}	[kN] 0.30
Shear load for minimum compressive strength		$\geq 6 \text{ N/mm}^2$	V_{Rk}	[kN] 0.30
DESIGN RESISTANCE				
Tension load for minimum compressive strength		$\geq 6 \text{ N/mm}^2$	N_{Rd}	[kN] 0.12
Shear load for minimum compressive strength		$\geq 6 \text{ N/mm}^2$	V_{Rd}	[kN] 0.12
RECOMENDED RESISTANCE				
Tension load for minimum compressive strength		$\geq 6 \text{ N/mm}^2$	N_{rec}	[kN] 0.09
Shear load for minimum compressive strength		$\geq 6 \text{ N/mm}^2$	V_{rec}	[kN] 0.09

7 IMPORTANT NOTICE

Values given in this document are valid under the assumptions of sufficient cleaning of the drill hole (not necessary with hollow brick). Resistance for tension, shear or combined tension and shear loading, is valid for a group of ≥ 3 anchors. For the design the complete European Technical Assessment has to be considered. In recommended resistance the partial safety factor for material as regulated in the ETA, as well as a partial safety factor for load action $\gamma_L = 1.4$ are considered. For combination of tensile loads, shear loads, bending moments as well as reduced edge distances or spacing's (anchor groups) see ETA or Mungo design software. The data must be checked by the user under the responsibility of an engineer experienced in anchorage and concrete work. This is to ensure there are no errors and all data is complete and accurate and complies with all rules and regulations for the actual conditions and application.